



PRODUCT CONSTRUCTION EXAMPLE

1 2 3 4 5 6


A A

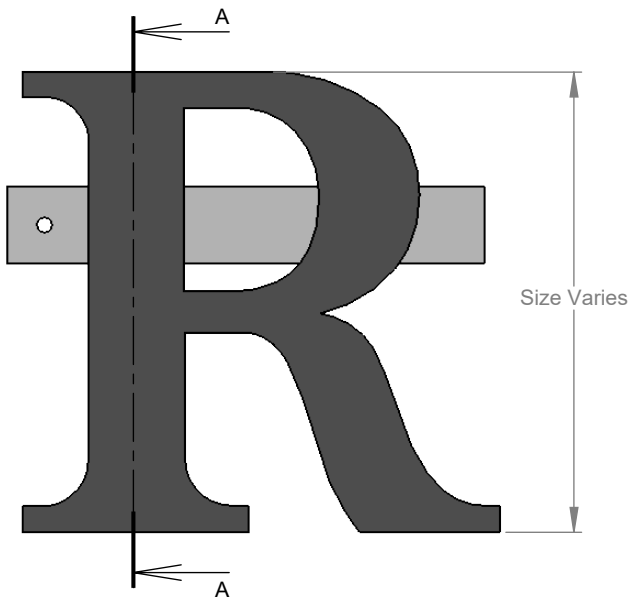


FRONT VIEW II SCALE 1:2.5

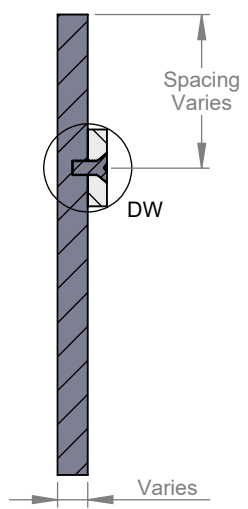

SECTION A-A II SCALE 1 : 2.5

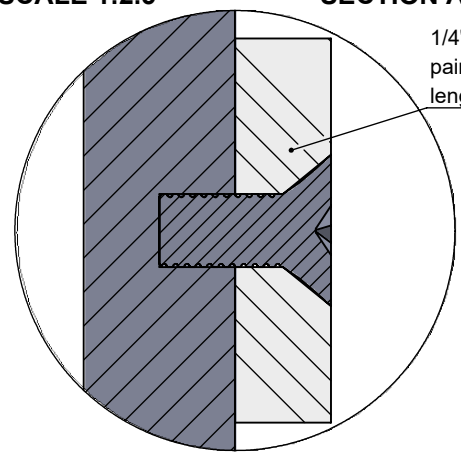

DETAIL DW II SCALE 2 : 1

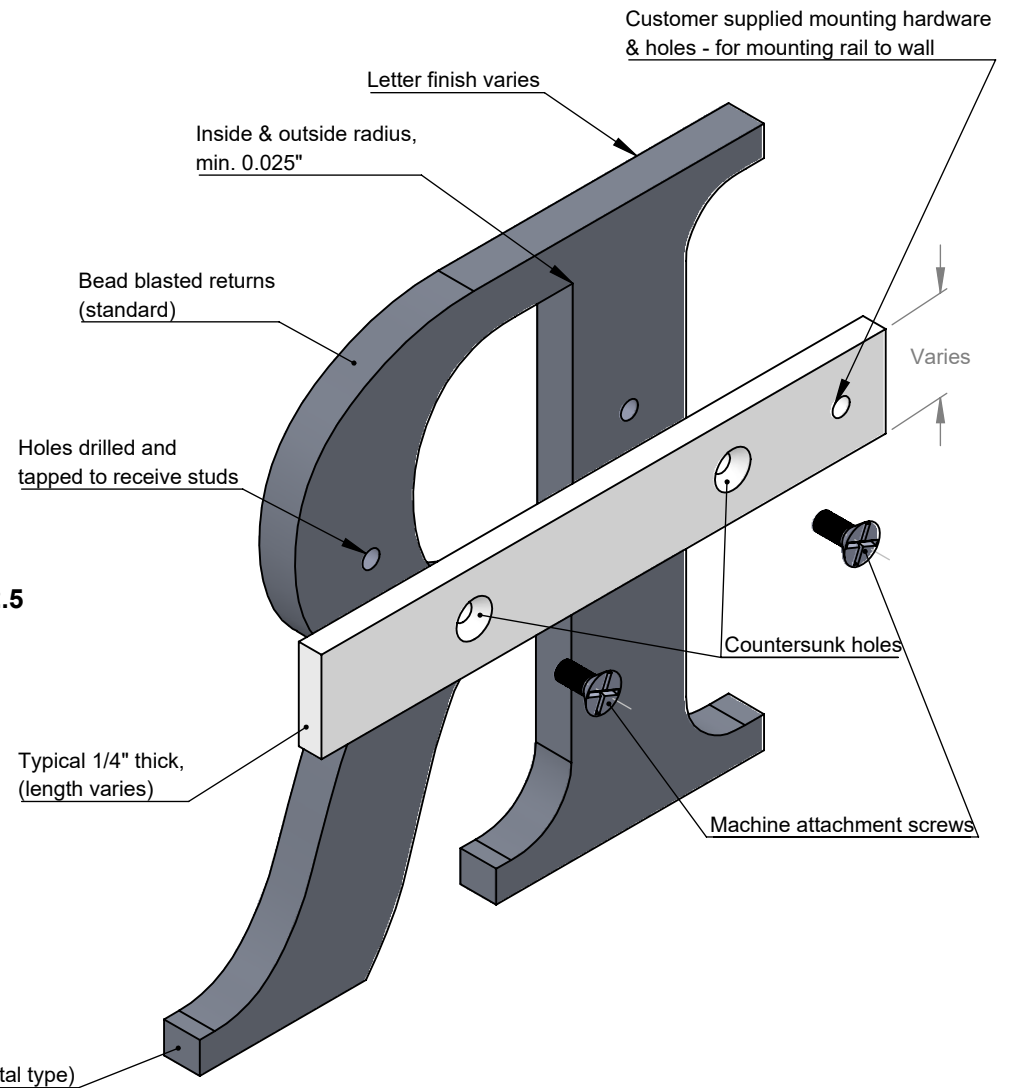

ISOMETRIC BACK VIEW II SCALE 1:1.5

- NOTES:**
- 4" - 8" high letters, typical
  - Minimum 1/4" thick letters (optional gauge based on metal type)
  - Optional - Letter back finished or unfinished.
  - Letters pre-assembled to rails to ensure fit- larger letters shipped loose
  - Min. 2 screws per letter
  - Flat 1/4" thick aluminum rails - standard, optional c-channel, painted or anodized
  - Max 95" long x 1/4", 1/2", 3/4" or 1" wide
  - 10/24 or 1/4-20 stainless steel attachment screws
  - Metal Rails are designed to be mounted to load bearing structures, holes and location to be determined by installer (rail mounting hardware and holes not included)
  - Letters or logos, standard or custom



TITLE: <b>FLAT CUT METAL - SINGLE RAIL MOUNT</b>			
MATERIAL: <b>METAL</b>		PRODUCT TYPE: <b>FLAT CUT METAL</b>	
DWG NO. FTMT50	REV. 03.22.23	SCALE: AS INDICATED	SHEET 1 OF 1

1 2