


Pronto™ Track Installation

Accurate spacing is the key to a good Pronto changeable letter system. Refer to the diagram shown here to select the method of track installation you prefer and determine the total height of your sign. The use of dual track automatically spaces the rows and reduces the number of track pieces required. If row spacing needs to be greater use a combination of top and bottom tracks.

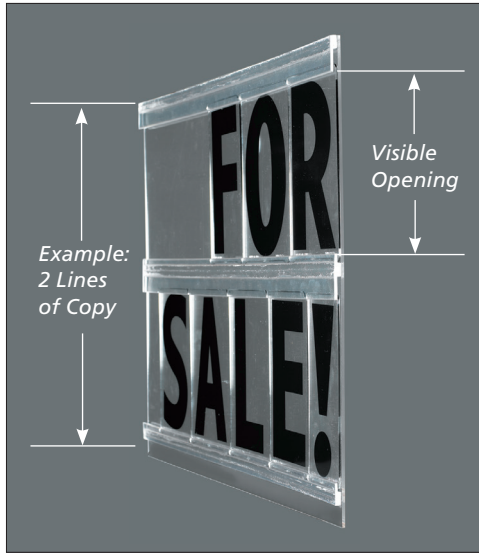


Standard Pronto Track Charts

Lines of Copy	TOP TO BOTTOM HEIGHT					
	3" Letter	4" Letter	6" Letter	8 on 9" Letter	8" Letter	10" Letter
1	5 1/2"	6 1/2"	8 1/2"	10 1/2"	11 1/2"	13 1/2"
2	10 3/8"	12 3/8"	16 3/8"	20 3/8"	22 3/8"	26 3/8"
3	15 1/4"	18 1/4"	24 1/4"	30 1/4"	33 1/4"	39 1/4"
4	20 1/8"	24 1/8"	32 1/8"	40 1/8"	44 1/8"	52 1/8"
5	25"	30"	40"	50"	55"	65"

VISIBLE OPENING FOR TRACK SPACING

	3" Letter	4" Letter	6" Letter	8 on 9" Letter	8" Letter	10" Letter
	3 1/4"	4 1/4"	6 1/4"	8 1/4"	9 1/4"	11 1/4"

Standard Pronto Track Dimensions

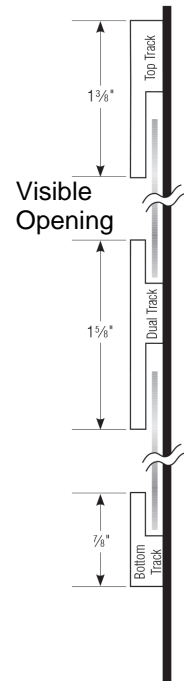

Expansion

If the surface you are attaching the Pronto Track onto will expand and contract at somewhat the same rate as the plastic track, installation can be done using either rivets or adhesive. Using a chalk line and level, mark the location for your first piece of track.


For a rivet installation: drill a hole through the track and background (maximum 8" center to center). To fasten track to 1/8" - 3/16" background, drill .1875 diameter hole (3/16" drill bit). Insert the Pronto rivet, then push the pin to its closed position.

For an adhesive installation: Using a syringe or bottle applicator with a thin needle tip, apply a steady line of adhesive, such as WELD-ON #3 or #4, to the back face of the track. Tape in place until adhesive has set up completely.

Non-expansion

If the surface you are attaching Pronto Track onto will not expand or contract (ie. wood or metal) at the same rate as the plastic track, we recommend the following installation procedure:

- Drill or route horizontal oblong or oversized holes in the track.
- Using a sheet metal screw, because of its squared shoulder; put the screw in the center of the horizontal hole.
- Do not tighten the screw. Leave it approximately 1/4 to 1/2 turn loose.
- When all the screws are in the track you should be able to wiggle horizontally a small distance.
- Now the track is able to expand or contract with temperature changes, and shouldn't buckle, crack or warp.



Mini acrylic dual track

Made specifically for 3" & 4" Pronto Letters and locations where additional lines of copy must fit in your space. Track profile is only 13/16" high.

Not to be used with standard profile track.

MINI PRONTO TRACK CHARTS

Lines of Copy Chart

1 Line of Copy	5.18"
2 Lines of Copy	9.56
3 Lines of Copy	13.93
4 Lines of Copy	18.30
5 Lines of Copy	22.67

1 Line of Copy	6.18
2 Lines of Copy	11.55
3 Lines of Copy	16.93
4 Lines of Copy	22.30
5 Lines of Copy	23.11

Visible Opening Chart

3 Inch Letter	3.56" Visible Opening
4 Inch Letter	4.56" Visible Opening